



## 200VA 240/480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$138.17 USD**



Single Phase Control Transformer with a capacity of 200VA, transforming 240/480 Volts to 120/240 Volts

SKU: CS200L-K

Categories: [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	A	B	C	Mounting Slot	F
25	1	3	2.5	2.5	3.33
50	3	3	2.5	2.5	3.33
100	3	4	2.5	2.5	3.75
150	3.75	4.25	3.13	3.25	4.5
200	3.75	4.5	3.13	3.25	4.5
250	3.75	5	3.13	3.25	4.5
350	4.5	5	3.75	3.75	4.75
500	5.25	5	4.38	4.5	5.75
750	5.25	5.5	4.38	4.5	5.75
1000	5.25	6.5	4.38	4.5	5.75
1500	6.75	7.25	5.63	5	5.75
2000	7.5	7.5	6.25	6	6.25
3000	7.5	8.25	6.25	6	6.5
5000	9	10	8	7	8

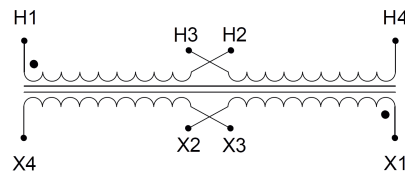

Single Phase Control Transformer with a capacity of 200VA, transforming 240/480 Volts to 120/240 Volts



## PRODUCT SPECIFICATIONS

Weight	23 lbs
Phases	<a href="#">1</a>
Connection	<a href="#">1Ph-CT-DD-SD</a>
Primary Voltage	<a href="#">240/480</a>
Primary Max Current	<a href="#">0.83A</a>
Primary Markings	<a href="#">H1-H2-H3-H4</a>
Primary Terminals	<a href="#">Terminals</a>
Secondary Voltage	<a href="#">120/240</a>
Secondary Max Current	<a href="#">1.67A</a>
Secondary Markings	<a href="#">X1-X2-X3-X4</a>
Secondary Terminals	<a href="#">Terminals</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Temperature Rise	<a href="#">80°C</a>
Insulation Class	<a href="#">130°C (Class B)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">Core &amp; Coil</a>
Enclosure Size	<a href="#">See Core &amp; Coil Chart</a>
Finish/Colour	<a href="#">N/A</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

200VA 240/480 VOLTS TO 120/240  
VOLTS SINGLE PHASE CONTROL  
TRANSFORMER



VA	<a href="#">200</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>