


OFFICIAL QUOTE

7.5KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER



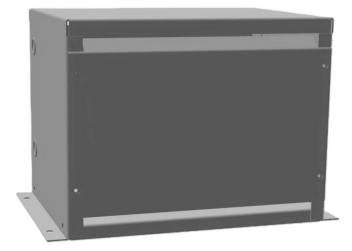

7.5KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$1,156.00 CAD

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 240 Volts to 415 Volts

SKU: MC7C-G2 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



| | ····· | |
|---------|-------|----|
| H0 / X0 | X1 | H1 |

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 240 Volts to 415 Volts



OFFICIAL QUOTE

7.5KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 70.2 lbs | |
|----------------------------|-----------------------------------------------------------------------------------------|--|
| Phases | 1 | |
| kVA | <u>7.5</u> | |
| Connection | <u>1PhA-NT-1</u> | |
| Primary Voltage | 240 | |
| Primary Max Current | <u>18A</u> | |
| Primary Markings | <u>X0-X1</u> | |
| Primary Terminals | Terminal Blocks | |
| Secondary Voltage | <u>415</u> | |
| Secondary Max Current | <u>10.4A</u> | |
| Secondary Markings | <u>H0-H1</u> | |
| Secondary Terminals | Terminal Blocks | |
| Primary Taps | N/A | |
| Conductor Material | <u>Copper</u> | |
| Insulation Class | 220°C (Class H) | |
| BIL (Insulation) Level | <u>10kV</u> | |
| Efficiency (@35% Load) % | <u>N/A</u> | |
| Impedance Range | <u>1.5 – 3.5%</u> | |
| Sound (db) | <u>40 dB</u> | |
| Enclosure Type | NEMA 1 | |
| Enclosure Size | <u>E1-1</u> | |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey | |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered | |



OFFICIAL QUOTE

7.5KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM