




**9VA 600 VOLTS TO 480Y/277 VOLTS
THREE PHASE ISOLATION
TRANSFORMER**

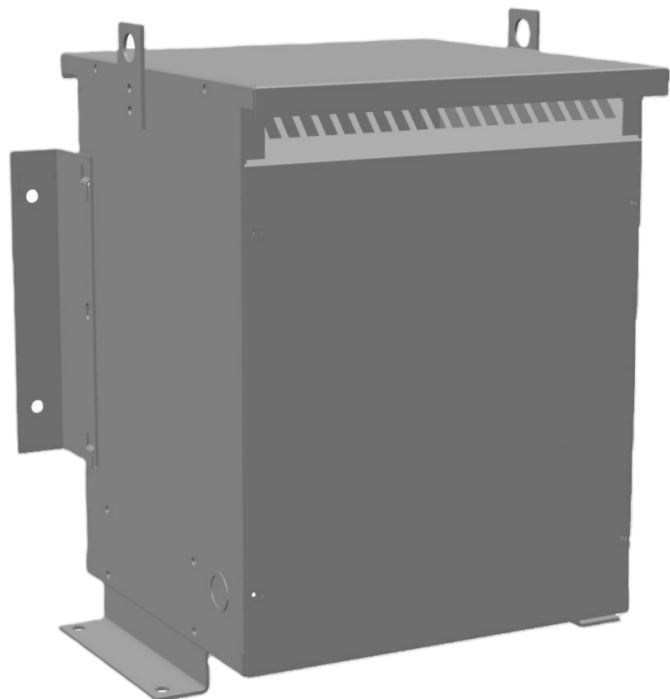

9VA 600 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER



\$1,978.76 CAD

Three Phase Isolation Transformer with a capacity of 9kVA, transforming 600 Volts to 480Y/277 Volts

SKU: BC9J-P

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

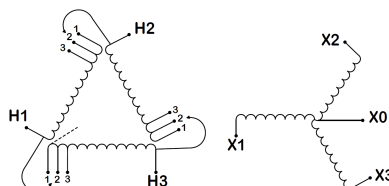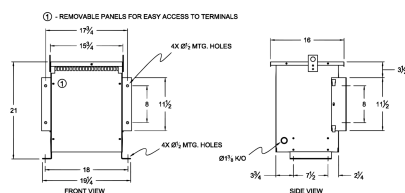

Three Phase Isolation Transformer with a capacity of 9kVA, transforming 600 Volts to 480Y/277 Volts



PRODUCT SPECIFICATIONS

| | |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight | 132 lbs |
| Phases | 3 |
| kVA | 9 |
| Connection | 3Ph-DY-3T-SD |
| Primary Voltage | 600 |
| Primary Max Current | 8.66A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | 480Y/277 |
| Secondary Max Current | 10.83A |
| Secondary Markings | X0-X1-X2-X3 |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | +/- 1 x 5% |
| Conductor Material | Copper |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 5.0 – 7.0% |
| Sound (db) | 40 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-4 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | 150°C |



OFFICIAL QUOTE

9VA 600 VOLTS TO 480Y/277 VOLTS
THREE PHASE ISOLATION
TRANSFORMER



| | |
|----------------------|----------------------------------------------------------|
| Insuation Class | 150°C |
| Country/Manufacturer | Canada/RPM |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |