


#### **OFFICIAL QUOTE**

### 37.5KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



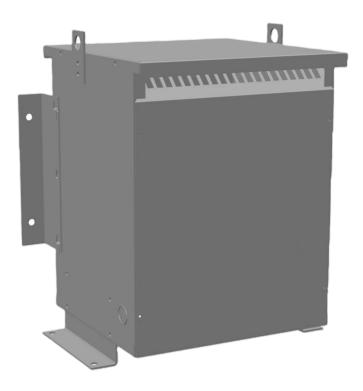

### 37.5KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$3,137.60 CAD


Single Phase Autotransformer with a capacity of 37.5kVA, transforming 415 Volts to 208 Volts

SKU: MC37G2-B

**Categories:** <u>Autotransformer</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 37.5kVA, transforming 415 Volts to 208 Volts



### **OFFICIAL QUOTE**



## 37.5KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 185.5 lbs  |
| Phases                     | 1  |
| kVA                        | <u>37.5</u>  |
| Connection                 | 1PhA-NT-1  |
| Primary Voltage            | 415  |
| Primary Max Current        | <u>52.2A</u>   |
| Primary Markings           | <u>H0-H1</u>   |
| Primary Terminals          | #2-14 AWG  |
| Secondary Voltage          | 208  |
| Secondary Max Current      | <u>104.1A</u>  |
| Secondary Markings         | <u>X0-X1</u>   |
| Secondary Terminals        | #2/0-6 AWG   |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 1.5 - 3.5%   |
| Sound (db)                 | 45 dB  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-4</u>   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



### **OFFICIAL QUOTE**

# 37.5KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|