


OFFICIAL QUOTE

37.5KVA 120 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



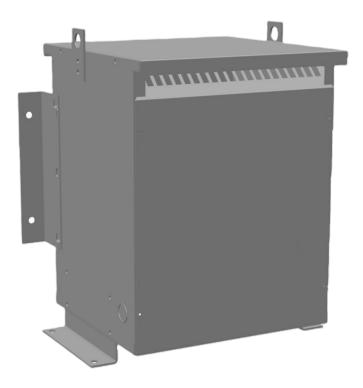

37.5KVA 120 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$2,030.50 USD


Single Phase Autotransformer with a capacity of 37.5kVA, transforming 120 Volts to 208 Volts

SKU: MC37A-B

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 37.5kVA, transforming 120 Volts to 208 Volts



OFFICIAL QUOTE

37.5KVA 120 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 165.2 lbs |
|----------------------------|--|
| Phases | 1 |
| kVA | 37.5 |
| Connection | <u>1PhA-NT-1</u> |
| Primary Voltage | 120 |
| Primary Max Current | 180.4A |
| Primary Markings | <u>X0-X1</u> |
| Primary Terminals | 300MCM-6 |
| Secondary Voltage | 208 |
| Secondary Max Current | 104.1A |
| Secondary Markings | <u>H0-H1</u> |
| Secondary Terminals | #2/0-6 AWG |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.5 - 3.5% |
| Sound (db) | 45 dB |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-4</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

37.5KVA 120 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|