



OFFICIAL QUOTE

750KVA 416 VOLTS TO 347 VOLTS
THREE PHASE AUTOTRANSFORMER



750KVA 416 VOLTS TO 347
VOLTS THREE PHASE
AUTOTRANSFORMER



\$10,838.80 CAD

Three Phase Autotransformer with a capacity of 750kVA, transforming 416Y Volts to 347Y Volts

SKU: RA750G-E

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

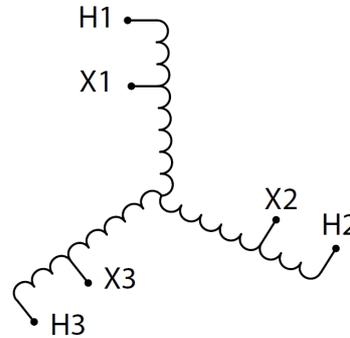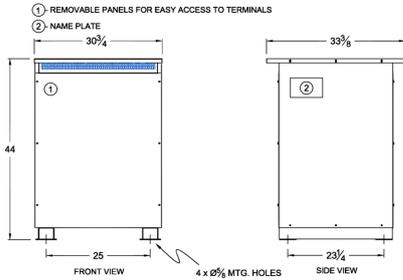

Three Phase Autotransformer with a capacity of 750kVA, transforming 416Y Volts to 347Y Volts



OFFICIAL QUOTE

750KVA 416 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| | |
|---------------------------------------|--|
| Weight | 863 lbs |
| Phases | 3 |
| kVA | 750 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 416 |
| Primary Max Current | 1040.9A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | Pads |
| Secondary Voltage | 347 |
| Secondary Max Current | 1247.9A |
| Secondary Markings | X1-X2-X3 |
| Secondary Terminals | Pads |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 0.5 – 1.5% |
| Sound (db) | 55 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-8 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

**750KVA 416 VOLTS TO 347 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer

[Canada/RPM](#)