



## OFFICIAL QUOTE

### 3KVA 240 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



## 3KVA 240 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



**\$1,204.37 CAD**

Single Phase Isolation Transformer with a capacity of 3kVA, transforming 240 Volts to 220/440 Volts

**SKU:** SC3C-L2

**Categories:** [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

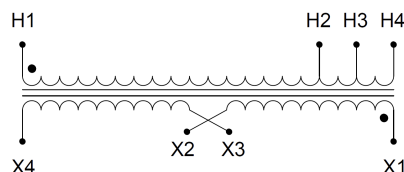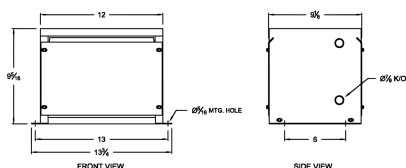

Single Phase Isolation Transformer with a capacity of 3kVA, transforming 240 Volts to 220/440 Volts



## OFFICIAL QUOTE

### 3KVA 240 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



#### PRODUCT SPECIFICATIONS

Weight	50 lbs
Phases	<a href="#">1</a>
kVA	<a href="#">3</a>
Connection	<a href="#">1Ph-1coil-3T-SD</a>
Primary Voltage	<a href="#">240</a>
Primary Max Current	<a href="#">12.5A</a>
Primary Markings	<a href="#">H1-H2</a>
Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">220/440</a>
Secondary Max Current	<a href="#">13.64A</a>
Secondary Markings	<a href="#">X1-X2</a>
Secondary Terminals	<a href="#">#2-14 AWG</a>
Primary Taps	<a href="#">+/- 1 x 5%</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 1</a>
Enclosure Size	<a href="#">E1-1</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Temperatue Rise	<a href="#">115°C</a>



OFFICIAL QUOTE

3KVA 240 VOLTS TO 220/440 VOLTS  
SINGLE PHASE ISOLATION  
TRANSFORMER

Insuation Class	<a href="#">115°C</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>