


#### **OFFICIAL QUOTE**

## 5KVA 416 VOLTS TO 200 VOLTS SINGLE PHASE AUTOTRANSFORMER



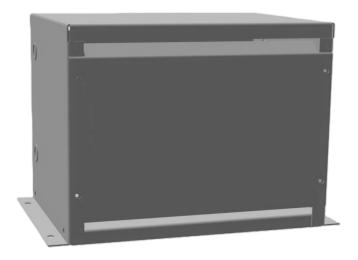

# 5KVA 416 VOLTS TO 200 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$783.24 USD


Single Phase Autotransformer with a capacity of 5kVA, transforming 416 Volts to 200 Volts

SKU: MC5G-B1

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Autotransformer with a capacity of 5kVA, transforming 416 Volts to 200 Volts



### **OFFICIAL QUOTE**



## 5KVA 416 VOLTS TO 200 VOLTS SINGLE PHASE AUTOTRANSFORMER

### **PRODUCT SPECIFICATIONS**

| PRODUCT SPECIFICATIONS     |                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------|
| Weight                     | 65.7 lbs                                                                             |
| Phases                     | 1                                                                                    |
| kVA                        | <u>5</u>                                                                             |
| Connection                 | 1PhA-NT-1                                                                            |
| Primary Voltage            | 416                                                                                  |
| Primary Max Current        | 6.9A                                                                                 |
| Primary Markings           | <u>H0-H1</u>                                                                         |
| Primary Terminals          | <u>Terminal Blocks</u>                                                               |
| Secondary Voltage          | 200                                                                                  |
| Secondary Max Current      | 14.4A                                                                                |
| Secondary Markings         | <u>X0-X1</u>                                                                         |
| Secondary Terminals        | Terminal Blocks                                                                      |
| Primary Taps               | N/A                                                                                  |
| Conductor Material         | Copper                                                                               |
| Insulation Class           | 180°C (Class F)                                                                      |
| BIL (Insulation) Level     | <u>10kV</u>                                                                          |
| Efficiency (@35% Load) %   | N/A                                                                                  |
| Impedance Range            | 1.5 - 3.5%                                                                           |
| Sound (db)                 | 40 dB                                                                                |
| Enclosure Type             | NEMA 1                                                                               |
| Enclosure Size             | <u>E1-1</u>                                                                          |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey                                             |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



### **OFFICIAL QUOTE**

## 5KVA 416 VOLTS TO 200 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|