


OFFICIAL QUOTE

75KVA 550 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



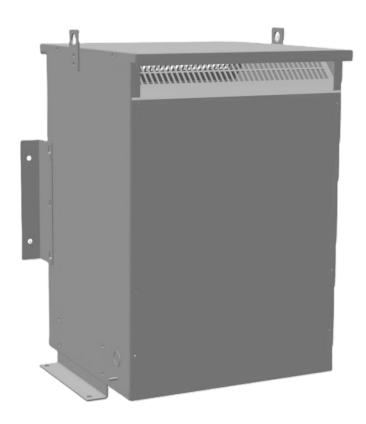

75KVA 550 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER


\$4,925.20 CAD


Three Phase Autotransformer with a capacity of 75kVA, transforming 550Y Volts to 277Y Volts

SKU: RC75J2-D

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 75kVA, transforming 550Y Volts to 277Y Volts



OFFICIAL QUOTE



75KVA 550 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	288 lbs
Phases	<u>3</u>
kVA	<u>75</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	<u>550</u>
Primary Max Current	78.7A
Primary Markings	H1-H2-H3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	277
Secondary Max Current	<u>156.3A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>300MCM-6</u>
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

75KVA 550 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------