


#### **OFFICIAL QUOTE**

### 112.5KVA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER



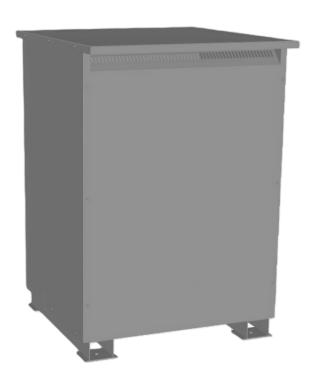

## 112.5KVA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$10,176.48 USD

Three Phase Isolation Transformer with a capacity of 112.5kVA, transforming 600 Volts to 415Y/240 Volts

**SKU:** BC112J-N2/Z3

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 112.5kVA, transforming 600 Volts to 415Y/240 Volts



### **OFFICIAL QUOTE**



# 112.5KVA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	890 lbs	
Phases	<u>3</u>	
kVA	112.5	
Connection	3Ph-DY-5T-SD	
Primary Voltage	600	
Primary Max Current	108.25A	
Primary Markings	H1-H2-H3	
Primary Terminals	<u>Pads</u>	
Secondary Voltage	415Y/240	
Secondary Max Current	<u>156.51A</u>	
Secondary Markings	<u>X0-X1-X2-X3</u>	
Secondary Terminals	<u>Pads</u>	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	Copper	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	98.74% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	<u>50</u>	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-8	
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



### **OFFICIAL QUOTE**



# 112.5KVA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	<u>150°C</u>
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey