

25VA 240/480 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$78.39 USD



Single Phase Control Transformer with a capacity of 25VA, transforming 240/480 Volts to 12/24 Volts

SKU: CS25L-Z

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers - Table of Dimensions (inches)									
VA Rating	Overall Dimensions					Mounting		Mounting	
	A	B	C	D	E	Flange	Flange	Flange	Flange
25	3	3	2.5	2.5	2.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
50	3	3	2.5	2.5	2.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
100	3	4	2.5	2.5	3	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
300	4.5	5	3.75	3.75	3.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
350	5.25	5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
400	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
450	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
500	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
550	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
600	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
650	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
700	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
750	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
800	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
850	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
900	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
950	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1000	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1100	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1200	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1300	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1400	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1500	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1600	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1700	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1800	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1900	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
2000	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
2200	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
2400	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
2600	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
2800	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
3000	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
3200	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
3400	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
3600	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
3800	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
4000	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
4200	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
4400	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
4600	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
4800	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
5000	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625

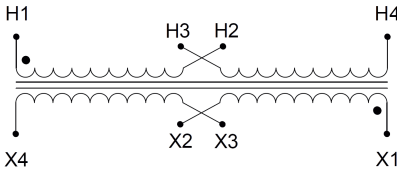

Single Phase Control Transformer with a capacity of 25VA, transforming 240/480 Volts to 12/24 Volts



PRODUCT SPECIFICATIONS

Weight	2.3 lbs
Phases	1
Connection	1Ph-CT-DD-SD
Primary Voltage	240/480
Primary Max Current	0.1A
Primary Markings	H1-H2-H3-H4
Primary Terminals	Terminals
Secondary Voltage	12/24
Secondary Max Current	2.08A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperature Rise	80°C
Insulation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

25VA 240/480 VOLTS TO 12/24
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM