



**15KVA 460 VOLTS TO 416 VOLTS  
THREE PHASE AUTOTRANSFORMER**



**15KVA 460 VOLTS TO 416  
VOLTS THREE PHASE  
AUTOTRANSFORMER**


**\$1,214.00 CAD**

Three Phase Autotransformer with a capacity of 15kVA, transforming 460Y Volts to 416Y Volts

**SKU:** RC15H1-G

**Categories:** [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

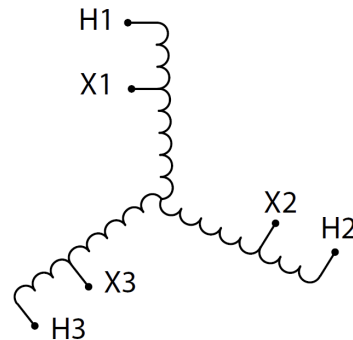

Three Phase Autotransformer with a capacity of 15kVA, transforming 460Y Volts to 416Y Volts



## PRODUCT SPECIFICATIONS

Weight	20 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">15</a>
Connection	<a href="#">3PhA-NT-1</a>
Primary Voltage	<a href="#">460</a>
Primary Max Current	<a href="#">18.8A</a>
Primary Markings	<a href="#">H1-H2-H3</a>
Primary Terminals	<a href="#">Terminal Blocks</a>
Secondary Voltage	<a href="#">416</a>
Secondary Max Current	<a href="#">20.8A</a>
Secondary Markings	<a href="#">X1-X2-X3</a>
Secondary Terminals	<a href="#">Terminal Blocks</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Insulation Class	<a href="#">180°C (Class F)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">0.5 – 1.5%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 1</a>
Enclosure Size	<a href="#">E1-1</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE  
15KVA 460 VOLTS TO 416 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<a href="#">Canada/RPM</a>
----------------------	----------------------------