


OFFICIAL QUOTE

150KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER



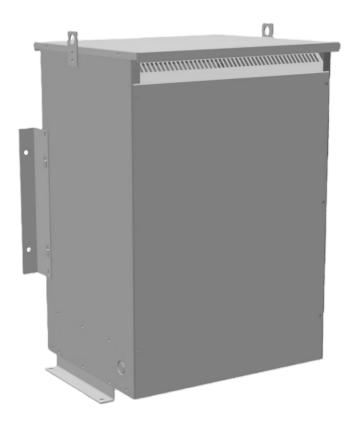

150KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$5,411.56 USD


Single Phase Autotransformer with a capacity of 150kVA, transforming 240 Volts to 415 Volts

SKU: MC150C-G2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 150kVA, transforming 240 Volts to 415 Volts



OFFICIAL QUOTE 150KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 520 lbs |
|----------------------------|--|
| Phases | 1 |
| kVA | 150 |
| Connection | 1PhA-NT-1 |
| Primary Voltage | 240 |
| Primary Max Current | 360.8A |
| Primary Markings | <u>X0-X1</u> |
| Primary Terminals | <u>Pads</u> |
| Secondary Voltage | 415 |
| Secondary Max Current | 208.7A |
| Secondary Markings | <u>H0-H1</u> |
| Secondary Terminals | 600MCM-2 |
| Primary Taps | N/A |
| Conductor Material | <u>Copper</u> |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.5 - 3.5% |
| Sound (db) | <u>55 dB</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-7</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

150KVA 240 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|