


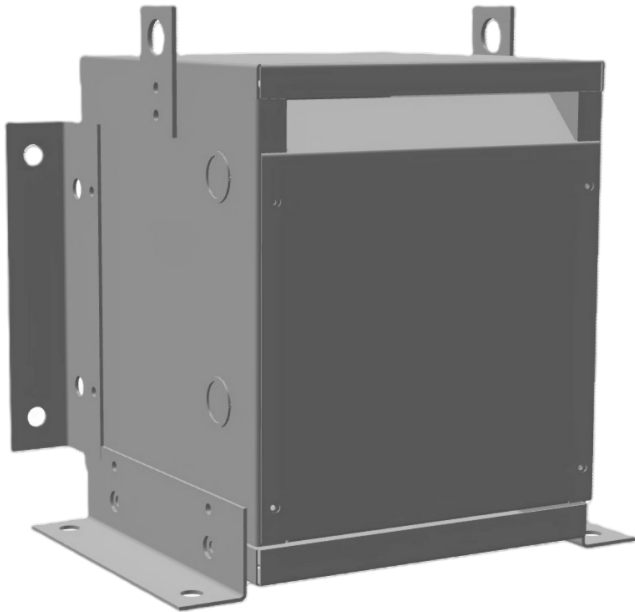

7.5KVA 600 VOLTS TO 200 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$1,444.30 CAD

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 600 Volts to 200 Volts

SKU: MC7J-B1

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

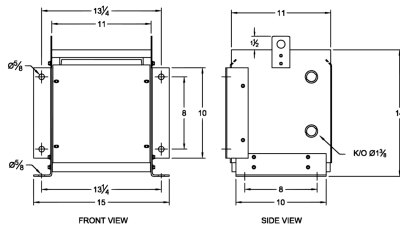

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 600 Volts to 200 Volts



PRODUCT SPECIFICATIONS

Weight	83.3 lbs
Phases	1
kVA	7.5
Connection	1PhA-NT-1
Primary Voltage	600
Primary Max Current	7.2A
Primary Markings	H0-H1
Primary Terminals	Terminal Blocks
Secondary Voltage	200
Secondary Max Current	21.7A
Secondary Markings	X0-X1
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	E1-2
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

7.5KVA 600 VOLTS TO 200 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------