


#### **OFFICIAL QUOTE**

## 15KVA 380 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



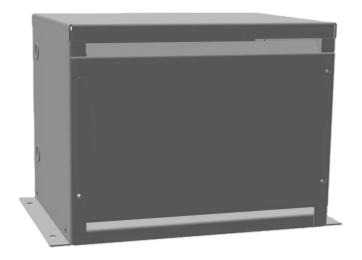

# 15KVA 380 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

### \$967.50 CAD

Three Phase Autotransformer with a capacity of 15kVA, transforming 380Y Volts to 400Y Volts

SKU: RC15F-G1

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 15kVA, transforming 380Y Volts to 400Y Volts



#### **OFFICIAL QUOTE**



## 15KVA 380 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

#### **PRODUCT SPECIFICATIONS**

| Weight                     | 20 lbs   |
|----------------------------|--|
| Phases                     | <u>3</u>   |
| kVA                        | <u>15</u>  |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 380  |
| Primary Max Current        | 22.8A  |
| Primary Markings           | <u>X1-X2-X3</u>  |
| Primary Terminals          | Terminal Blocks  |
| Secondary Voltage          | 400  |
| Secondary Max Current      | 21.7A  |
| Secondary Markings         | <u>H1-H2-H3</u>  |
| Secondary Terminals        | Terminal Blocks  |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 180°C (Class F)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 0.5 - 1.5%   |
| Sound (db)                 | 40   |
| Enclosure Type             | NEMA 1   |
| Enclosure Size             | <u>E1-1</u>  |
| Finish/Colour              | Polyester Powder Coat – ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



#### **OFFICIAL QUOTE**

## 15KVA 380 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | <u>Canada/RPM</u> |
|----------------------|-------------------|
|----------------------|-------------------|