


OFFICIAL QUOTE

750KVA 208 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



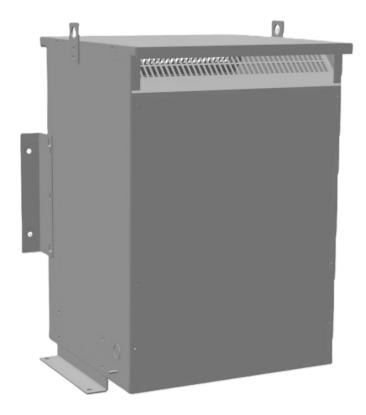

750KVA 208 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER

\$5,207.30 CAD

Three Phase Autotransformer with a capacity of 750kVA, transforming 208Y Volts to 200Y Volts

SKU: RA750B-B1 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 750kVA, transforming 208Y Volts to 200Y Volts



OFFICIAL QUOTE

750KVA 208 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 161 lbs |
|----------------------------|---|
| Phases | 3 |
| kVA | 750 |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | 208 |
| Primary Max Current | <u>2081.8A</u> |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | Pads |
| Secondary Voltage | 200 |
| Secondary Max Current | <u>2165.1A</u> |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | Pads |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | <u>220°C (Class H)</u> |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | <u>N/A</u> |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | <u>45</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-6</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

750KVA 208 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM