


#### **OFFICIAL QUOTE**

# 9KVA 415 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



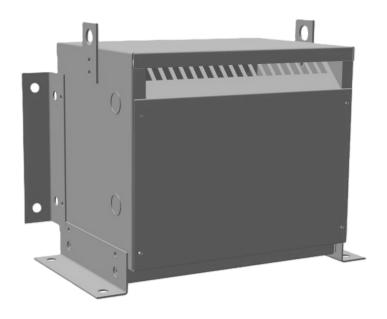

## 9KVA 415 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,718.90 CAD

Three Phase Autotransformer with a capacity of 9kVA, transforming 415Y Volts to 208Y Volts

SKU: RC9G2-B

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 9kVA, transforming 415Y Volts to 208Y Volts



### **OFFICIAL QUOTE**





#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 31 lbs   |
| Phases                     | <u>3</u>   |
| kVA                        | 9  |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 415  |
| Primary Max Current        | 12.5A  |
| Primary Markings           | H1-H2-H3   |
| Primary Terminals          | <u>Terminal Blocks</u>   |
| Secondary Voltage          | 208  |
| Secondary Max Current      | 25A  |
| Secondary Markings         | <u>X1-X2-X3</u>  |
| Secondary Terminals        | Terminal Blocks  |
| Primary Taps               | N/A  |
| Conductor Material         | <u>Copper</u>  |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | <u>1.5 – 3.5%</u>  |
| Sound (db)                 | 40   |
| Enclosure Type             | NEMA 1   |
| Enclosure Size             | <u>E1-3</u>  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



### **OFFICIAL QUOTE**

# 9KVA 415 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|