


#### **OFFICIAL QUOTE**

# 3KVA 240 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER



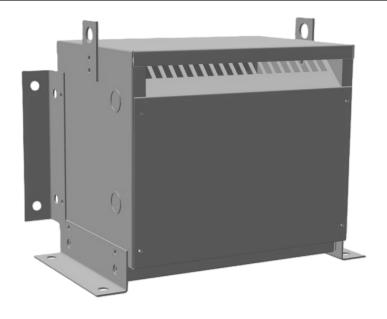

# 3KVA 240 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,087.15 USD


Three Phase Isolation Transformer with a capacity of 3kVA, transforming 240 Volts to 480Y/277 Volts

SKU: BC3C-P

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Isolation Transformer with a capacity of 3kVA, transforming 240 Volts to 480Y/277 Volts



#### **OFFICIAL QUOTE**



## 3KVA 240 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

#### **PRODUCT SPECIFICATIONS**

| PRODUCT SPECIFICATIONS     |  |  |
|----------------------------|--|--|
| Weight                     | 73 lbs   |  |
| Phases                     | <u>3</u>   |  |
| kVA                        | <u>3</u>   |  |
| Connection                 | 3Ph-DY-3T-SU   |  |
| Primary Voltage            | 240  |  |
| Primary Max Current        | 7.22A  |  |
| Primary Markings           | <u>X1-X2-X3</u>  |  |
| Primary Terminals          | #2-14 AWG  |  |
| Secondary Voltage          | 480Y/277   |  |
| Secondary Max Current      | 3.61A  |  |
| Secondary Markings         | <u>H0-H1-H2-H3</u>   |  |
| Secondary Terminals        | #2-14 AWG  |  |
| Primary Taps               | +/- 1 x 5%   |  |
| Conductor Material         | Copper   |  |
| BIL (Insulation) Level     | <u>10kV</u>  |  |
| Efficiency (@35% Load) %   | N/A  |  |
| Impedance Range            | <u>5.0 - 7.0%</u>  |  |
| Sound (db)                 | 40   |  |
| Enclosure Type             | NEMA 1   |  |
| Enclosure Size             | E1-3   |  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |  |
| Temperatue Rise            | 115°C  |  |



#### **OFFICIAL QUOTE**



## 3KVA 240 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

| Insuation Class      | 115°C                                    |
|----------------------|--|
| Country/Manufacturer | Canada/RPM                               |
| Finish/Colour        | Polyester Powder Coat - ANSI/ASA 61 Grey |