


OFFICIAL QUOTE

3KVA 240 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER



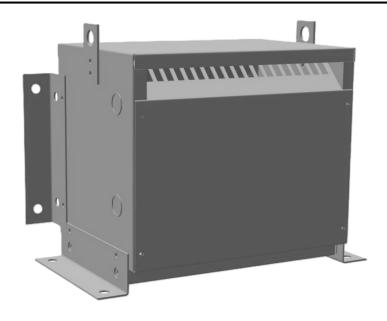

3KVA 240 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,618.75 CAD


Three Phase Isolation Transformer with a capacity of 3kVA, transforming 240 Volts to 460Y/266 Volts

SKU: BC3C-P1

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 3kVA, transforming 240 Volts to 460Y/266 Volts



OFFICIAL QUOTE



3KVA 240 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	73 lbs
Phases	<u>3</u>
kVA	<u>3</u>
Connection	3Ph-DY-3T-SU
Primary Voltage	240
Primary Max Current	7.22A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	460Y/266
Secondary Max Current	3.77A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	<u>+/- 1 x 5%</u>
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	115°C



OFFICIAL QUOTE



3KVA 240 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey