


OFFICIAL QUOTE

30KVA 416 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



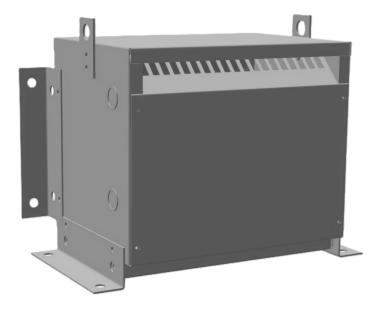

30KVA 416 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER

\$1,861.65 USD

Three Phase Autotransformer with a capacity of 30kVA, transforming 416Y Volts to 575Y Volts

SKU: RC30G-J1 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 416Y Volts to 575Y Volts



OFFICIAL QUOTE

30KVA 416 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	61 lbs
Phases	3
kVA	30
Connection	<u>3PhA-NT-1</u>
Primary Voltage	<u>416</u>
Primary Max Current	<u>41.6A</u>
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>#2-14 AWG</u>
Secondary Voltage	<u>575</u>
Secondary Max Current	<u>30.1A</u>
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	<u>220°C (Class H)</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	<u>N/A</u>
Impedance Range	<u>1.0 – 3.0%</u>
Sound (db)	<u>40</u>
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	<u>CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015</u> <u>Registered</u>



OFFICIAL QUOTE

30KVA 416 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM