


OFFICIAL QUOTE

2500KVA 600 VOLTS TO 480 VOLTS THREE PHASE AUTOTRANSFORMER



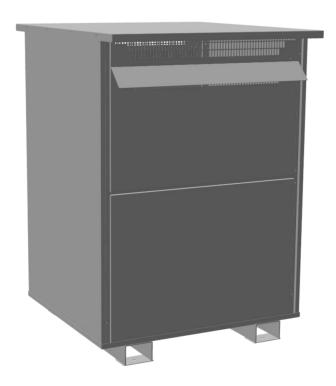

2500KVA 600 VOLTS TO 480 VOLTS THREE PHASE AUTOTRANSFORMER


\$39,741.20 CAD


Three Phase Autotransformer with a capacity of 2500kVA, transforming 600Y Volts to 480Y Volts

SKU: RA2500J-H

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 2500kVA, transforming 600Y Volts to 480Y Volts



OFFICIAL QUOTE



2500KVA 600 VOLTS TO 480 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	3281 lbs
Phases	<u>3</u>
kVA	2500
Connection	3PhA-NT-1
Primary Voltage	600
Primary Max Current	2405.6A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	480
Secondary Max Current	3007A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-10</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

2500KVA 600 VOLTS TO 480 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------