


OFFICIAL QUOTE

225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



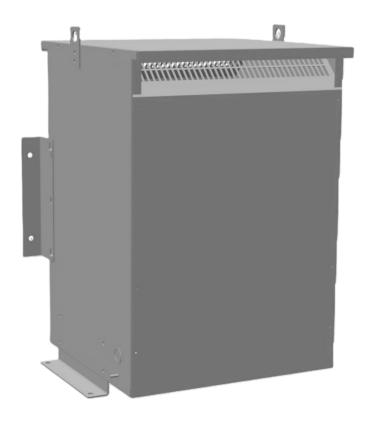

225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,945.00 CAD


Three Phase Autotransformer with a capacity of 225kVA, transforming 460Y Volts to 400Y Volts

SKU: RA225H1-G1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 225kVA, transforming 460Y Volts to 400Y Volts



OFFICIAL QUOTE



225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 164 lbs |
| Phases | <u>3</u> |
| kVA | 225 |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | 460 |
| Primary Max Current | 282.4A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | <u>Pads</u> |
| Secondary Voltage | 400 |
| Secondary Max Current | <u>324.8A</u> |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | 45 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-6</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | <u>Canada/RPM</u> |
|----------------------|-------------------|
|----------------------|-------------------|