


OFFICIAL QUOTE

225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



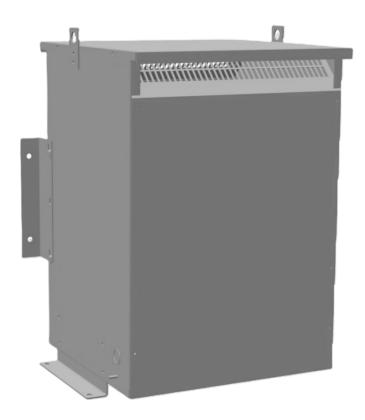

225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,945.00 CAD

Three Phase Autotransformer with a capacity of 225kVA, transforming 460Y Volts to 400Y Volts

SKU: RA225H1-G1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 225kVA, transforming 460Y Volts to 400Y Volts



OFFICIAL QUOTE



225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	164 lbs
Phases	<u>3</u>
kVA	225
Connection	3PhA-NT-1
Primary Voltage	460
Primary Max Current	282.4A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	400
Secondary Max Current	<u>324.8A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

225KVA 460 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------