


OFFICIAL QUOTE

112KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



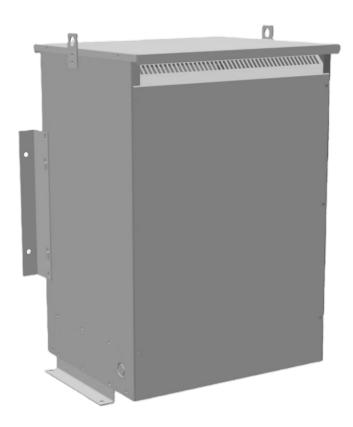

112KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER

\$4,326.10 USD


Three Phase Autotransformer with a capacity of 112.5kVA, transforming 440Y Volts to 200Y Volts

SKU: RA112H2-B1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 112.5kVA, transforming 440Y Volts to 200Y Volts



OFFICIAL QUOTE



112KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	381 lbs
Phases	<u>3</u>
kVA	112.5
Connection	<u>3PhA-NT-1</u>
Primary Voltage	440
Primary Max Current	147.6A
Primary Markings	H1-H2-H3
Primary Terminals	<u>300MCM-6</u>
Secondary Voltage	200
Secondary Max Current	<u>324.8A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-7
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

112KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------