


OFFICIAL QUOTE

15KVA 208 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER



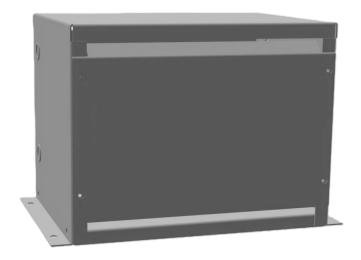

15KVA 208 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER


\$992.00 CAD

Three Phase Autotransformer with a capacity of 15kVA, transforming 208Y Volts to 220Y Volts

SKU: RC15B-C2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 15kVA, transforming 208Y Volts to 220Y Volts



OFFICIAL QUOTE



15KVA 208 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	20 lbs
Phases	<u>3</u>
kVA	<u>15</u>
Connection	3PhA-NT-1
Primary Voltage	208
Primary Max Current	41.6A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	220
Secondary Max Current	<u>39.4A</u>
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	180°C (Class F)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-1</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE



15KVA 208 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER