


OFFICIAL QUOTE

150KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



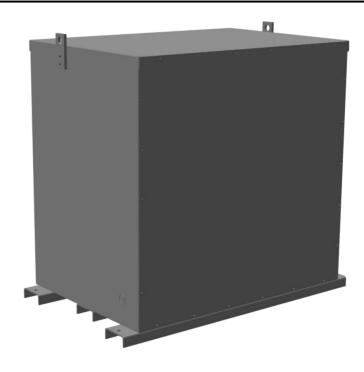

150KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$35,182.00 CAD


Three Phase Encapsulated Isolation Transformer with a capacity of 150kVA, transforming 460 Volts to 208Y/120 Volts

SKU: BC150H1-M/EP

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Isolation Transformer with a capacity of 150kVA, transforming 460 Volts to 208Y/120 Volts



OFFICIAL QUOTE



150KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	2020 lbs
Phases	<u>3</u>
kVA	150
Connection	3Ph-DY-5T-SD
Primary Voltage	460
Primary Max Current	971.5A
Primary Markings	H1-H2-3
Primary Terminals	300MCM-6
Secondary Voltage	<u>208Y/120</u>
Secondary Max Current	416.4A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-3PEP-9</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Country/Manufacturer	Canada/RPM