


OFFICIAL QUOTE

225KVA 400 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



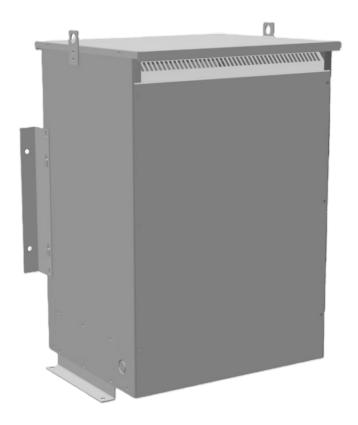

225KVA 400 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER


\$9,547.90 CAD

Three Phase Autotransformer with a capacity of 225kVA, transforming 400Y Volts to 277Y Volts

SKU: RC225G1-D

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 225kVA, transforming 400Y Volts to 277Y Volts



OFFICIAL QUOTE



225KVA 400 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	586 lbs
Phases	<u>3</u>
kVA	225
Connection	<u>3PhA-NT-1</u>
Primary Voltage	400
Primary Max Current	324.8A
Primary Markings	H1-H2-H3
Primary Terminals	<u>Pads</u>
Secondary Voltage	277
Secondary Max Current	469A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

225KVA 400 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------