


#### **OFFICIAL QUOTE**

### 500KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



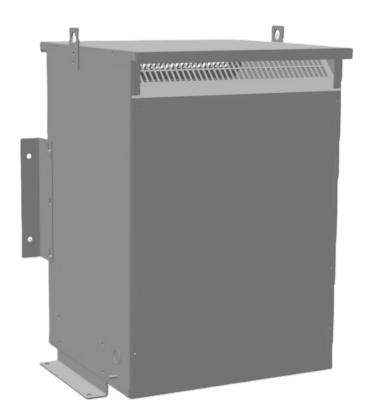

# 500KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER

\$3,767.46 USD


Three Phase Autotransformer with a capacity of 500kVA, transforming 415Y Volts to 440Y Volts

SKU: RA500G2-H2

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 500kVA, transforming 415Y Volts to 440Y Volts



#### **OFFICIAL QUOTE**



## 500KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER

#### **PRODUCT SPECIFICATIONS**

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 158 lbs  |
| Phases                     | <u>3</u>   |
| kVA                        | 500  |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 415  |
| Primary Max Current        | <u>695.6A</u>  |
| Primary Markings           | <u>X1-X2-X3</u>  |
| Primary Terminals          | <u>Pads</u>  |
| Secondary Voltage          | 440  |
| Secondary Max Current      | 656.1A   |
| Secondary Markings         | <u>H1-H2-H3</u>  |
| Secondary Terminals        | <u>Pads</u>  |
| Primary Taps               | N/A  |
| Conductor Material         | Aluminum   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | <u>0.5 – 1.5%</u>  |
| Sound (db)                 | <u>45</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-6</u>   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



#### **OFFICIAL QUOTE**

## 500KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|