


### **OFFICIAL QUOTE**

## 75KVA 400 VOLTS TO 110/220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



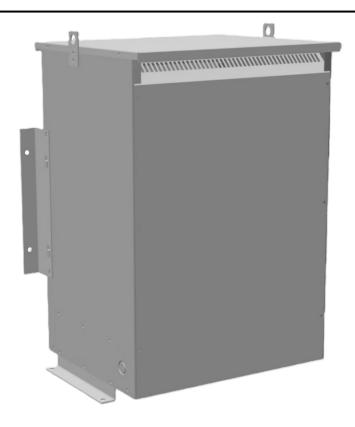

# 75KVA 400 VOLTS TO 110/220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$6,111.30 USD


Single Phase Isolation Transformer with a capacity of 75kVA, transforming 400 Volts to 110/220 Volts

**SKU:** SC75G1-K2/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Isolation Transformer with a capacity of 75kVA, transforming 400 Volts to 110/220 Volts



## **OFFICIAL QUOTE**



# 75KVA 400 VOLTS TO 110/220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	444 lbs
Phases	1
kVA	<u>75</u>
Connection	1Ph-2coil-5t-SD
Primary Voltage	400
Primary Max Current	187.5A
Primary Markings	H1-H2
Primary Terminals	600 MCM - 2
Secondary Voltage	110/220
Secondary Max Current	681.82A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	600 MCM - 2
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.50% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



## **OFFICIAL QUOTE**



# 75KVA 400 VOLTS TO 110/220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey