


OFFICIAL QUOTE

25KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



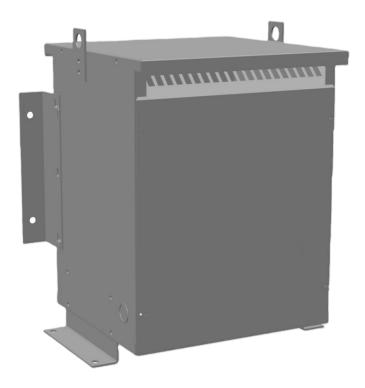

25KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$2,355.70 CAD


Single Phase Autotransformer with a capacity of 25kVA, transforming 415 Volts to 208 Volts

SKU: MC25G2-B

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 25kVA, transforming 415 Volts to 208 Volts



OFFICIAL QUOTE

25KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	139.2 lbs
Phases	1
kVA	<u>25</u>
Connection	1PhA-NT-1
Primary Voltage	415
Primary Max Current	<u>34.8A</u>
Primary Markings	<u>H0-H1</u>
Primary Terminals	<u>Terminal Blocks</u>
Secondary Voltage	208
Secondary Max Current	<u>69.4A</u>
Secondary Markings	<u>X0-X1</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	45 dB
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

25KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------