


OFFICIAL QUOTE

6KVA 600 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER



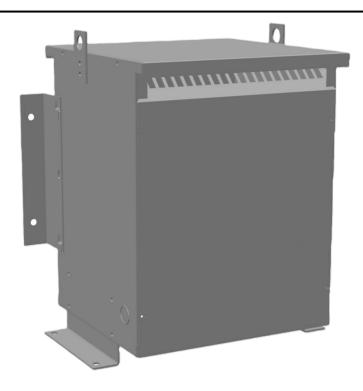

6KVA 600 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,636.88 CAD


Three Phase Isolation Transformer with a capacity of 6kVA, transforming 600 Volts to 480Y/277 Volts

SKU: BC6J-P

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 6kVA, transforming 600 Volts to 480Y/277 Volts



OFFICIAL QUOTE



6KVA 600 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

| Weight | 116 lbs |
|----------------------------|--|
| Phases | <u>3</u> |
| kVA | <u>6</u> |
| Connection | 3Ph-DY-3T-SD |
| Primary Voltage | 600 |
| Primary Max Current | <u>5.77A</u> |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | 480Y/277 |
| Secondary Max Current | 7.22A |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | +/- 1 x 5% |
| Conductor Material | Copper |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>5.0 – 7.0%</u> |
| Sound (db) | 40 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-4</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | 150°C |



OFFICIAL QUOTE



6KVA 600 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

| Insuation Class | 150°C |
|----------------------|--|
| Country/Manufacturer | Canada/RPM |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |