


OFFICIAL QUOTE

6VA 416 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER



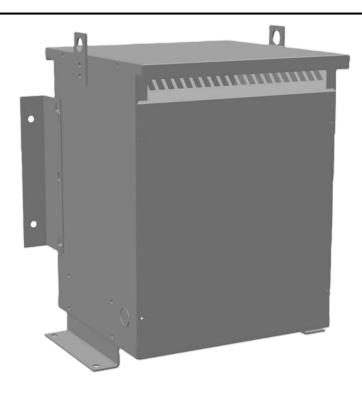

6VA 416 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$1,833.31 CAD


Three Phase Isolation Transformer with a capacity of 6kVA, transforming 416 Volts to 480Y/277 Volts

SKU: BC6G-P

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 6kVA, transforming 416 Volts to 480Y/277 Volts



OFFICIAL QUOTE



6VA 416 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	116 lbs
Phases	<u>3</u>
kVA	<u>6</u>
Connection	3Ph-DY-3T-SU
Primary Voltage	416
Primary Max Current	8.33A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	480Y/277
Secondary Max Current	7.22A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



6VA 416 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	<u>150°C</u>	-
Country/Manufacturer	Canada/RPM	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	