


OFFICIAL QUOTE

150KVA 600 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER



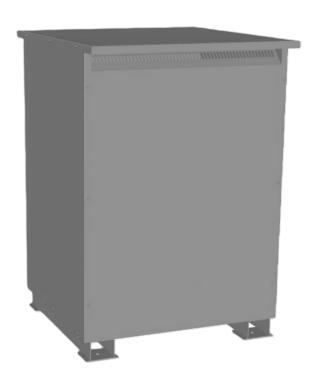

150KVA 600 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER


\$10,360.66 USD

Three Phase Autotransformer with a capacity of 150kVA, transforming 600Y Volts to 115Y Volts

SKU: RC150J-A1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 150kVA, transforming 600Y Volts to 115Y Volts



OFFICIAL QUOTE

150KVA 600 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 1118 lbs |
|----------------------------|--|
| Phases | <u>3</u> |
| kVA | <u>150</u> |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 600 |
| Primary Max Current | 144.3A |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | 300MCM-6 |
| Secondary Voltage | 115 |
| Secondary Max Current | 753.1A |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 2.5 - 4.5% |
| Sound (db) | <u>55</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-8</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

150KVA 600 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | <u>Canada/RPM</u> |
|----------------------|-------------------|
|----------------------|-------------------|