


OFFICIAL QUOTE

600KVA 347 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



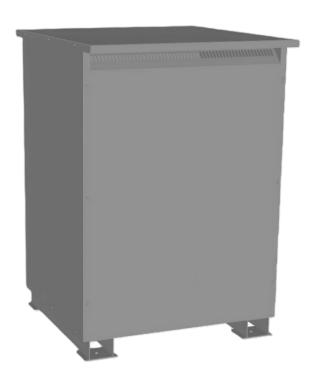

600KVA 347 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER


\$10,741.29 USD

Three Phase Autotransformer with a capacity of 600kVA, transforming 347Y Volts to 440Y Volts

SKU: RC600E-H2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 600kVA, transforming 347Y Volts to 440Y Volts



OFFICIAL QUOTE

600KVA 347 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	1177 lbs
Phases	<u>3</u>
kVA	600
Connection	3PhA-NT-1
Primary Voltage	347
Primary Max Current	998.3A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	440
Secondary Max Current	787.3A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

600KVA 347 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------