


#### **OFFICIAL QUOTE**

## 25KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



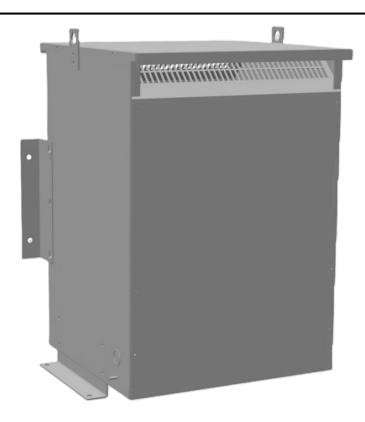

# 25KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$4,127.76 CAD


Single Phase Isolation Transformer with a capacity of 25kVA, transforming 200 Volts to 240 Volts

**SKU:** SC25B1-C/Z3

**Categories:** <u>Isolation Transformers</u>

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 25kVA, transforming 200 Volts to 240 Volts



### **OFFICIAL QUOTE**



## 25KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

### **PRODUCT SPECIFICATIONS**

Watala	005 lb a
Weight	225 lbs
Phases	1
kVA	<u>25</u>
Connection	1Ph-2coil-5T-SU
Primary Voltage	200
Primary Max Current	125.0A
Primary Markings	<u>X1-X2</u>
Primary Terminals	<u>300 MCM – 6</u>
Secondary Voltage	240
Secondary Max Current	104.17A
Secondary Markings	<u>H1-H2</u>
Secondary Terminals	<u>300 MCM – 6</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Copper</u>
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	98.00% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



### **OFFICIAL QUOTE**



## 25KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey