



150KVA 208 VOLTS TO 600 VOLTS
SINGLE PHASE AUTOTRANSFORMER



150KVA 208 VOLTS TO 600
VOLTS SINGLE PHASE
AUTOTRANSFORMER



\$7,685.95 USD

Single Phase Autotransformer with a capacity of 150kVA, transforming 208 Volts to 600 Volts

SKU: MC150B-J

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

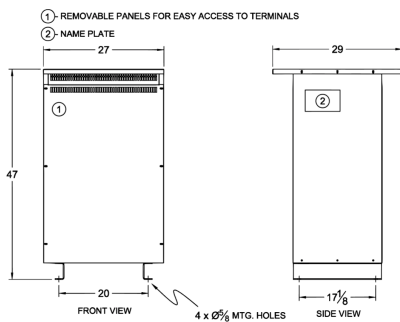

Single Phase Autotransformer with a capacity of 150kVA, transforming 208 Volts to 600 Volts



PRODUCT SPECIFICATIONS

Weight	767.8 lbs
Phases	1
kVA	150
Connection	1PhA-NT-1
Primary Voltage	208
Primary Max Current	416.4A
Primary Markings	X0-X1
Primary Terminals	Pads
Secondary Voltage	600
Secondary Max Current	144.3A
Secondary Markings	H0-H1
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	55 dB
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8S
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

150KVA 208 VOLTS TO 600 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)