

## 112.5KVA 600 VOLTS TO 480 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



**\$4,370.00 CAD**

Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 480Y Volts

**SKU:** RA112J-H/EP

**Categories:** [Encapsulated Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

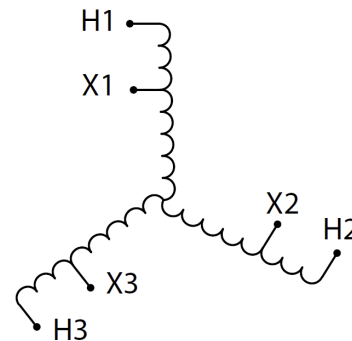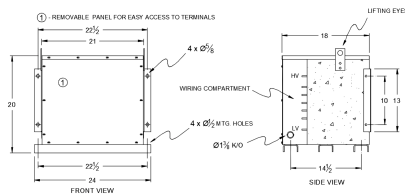

Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 480Y Volts



112.5KVA 600 VOLTS TO 480 VOLTS  
THREE PHASE ENCAPSULATED  
AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	660 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">112.5</a>
Connection	<a href="#">3PhA-NT-1</a>
Primary Voltage	<a href="#">600</a>
Primary Markings	<a href="#">H1-H2-H3</a>
Primary Terminals	<a href="#">300MCM-6</a>
Secondary Voltage	<a href="#">480</a>
Secondary Markings	<a href="#">X1-X2-X3</a>
Secondary Terminals	<a href="#">300MCM-6</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Aluminum</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">0.5 – 1.5%</a>
Sound (db)	<a href="#">45</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-3PEP-5</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Temperatue Rise	<a href="#">130°C</a>
Insuation Class	<a href="#">200°C (Class N)</a>