


OFFICIAL QUOTE

45KVA 550 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



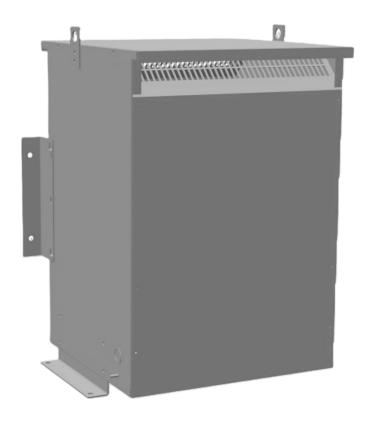

45KVA 550 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER


\$4,167.00 CAD


Three Phase Autotransformer with a capacity of 45kVA, transforming 550Y Volts to 208Y Volts

SKU: RC45J2-B

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 45kVA, transforming 550Y Volts to 208Y Volts



OFFICIAL QUOTE



45KVA 550 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	207 lbs
Phases	<u>3</u>
kVA	<u>45</u>
Connection	3PhA-NT-1
Primary Voltage	<u>550</u>
Primary Max Current	47.2A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	208
Secondary Max Current	<u>124.9A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

45KVA 550 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------