


OFFICIAL QUOTE

45KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



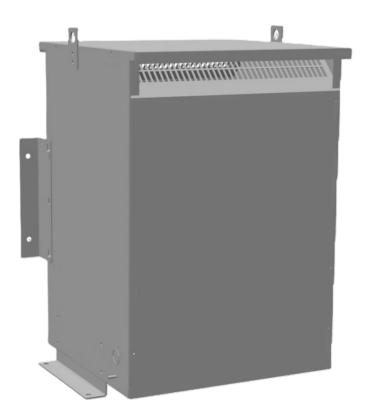

45KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,730.30 CAD


Three Phase Autotransformer with a capacity of 45kVA, transforming 440Y Volts to 208Y Volts

SKU: RC45H2-B

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 45kVA, transforming 440Y Volts to 208Y Volts



OFFICIAL QUOTE

45KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	206 lbs
Phases	<u>3</u>
kVA	45
Connection	<u>3PhA-NT-1</u>
Primary Voltage	440
Primary Max Current	<u>59A</u>
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	208
Secondary Max Current	124.9A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

45KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------