




# OFFICIAL QUOTE

## 150KVA 600 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

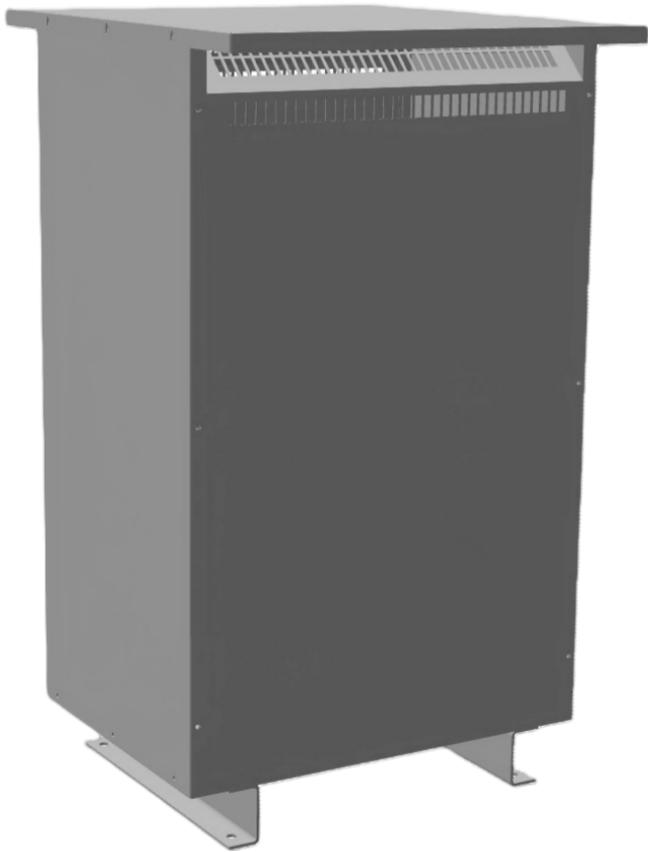

# 150KVA 600 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



## \$9,358.43 CAD

Single Phase Isolation Transformer with a capacity of 150kVA, transforming 600 Volts to 220/440 Volts

**SKU:** SA150J-L2/Z3

**Categories:** [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

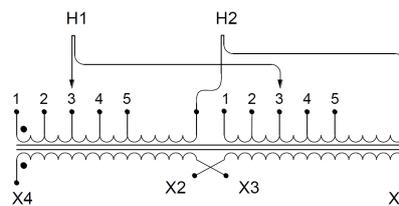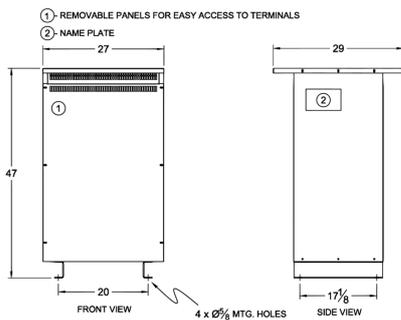

Single Phase Isolation Transformer with a capacity of 150kVA, transforming 600 Volts to 220/440 Volts



## OFFICIAL QUOTE

### 150KVA 600 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



#### PRODUCT SPECIFICATIONS

<b>Weight</b>	851 lbs
<b>Phases</b>	<a href="#">1</a>
<b>kVA</b>	<a href="#">150</a>
<b>Connection</b>	<a href="#">1Ph-2coil-5t-SD</a>
<b>Primary Voltage</b>	<a href="#">600</a>
<b>Primary Max Current</b>	<a href="#">250.0A</a>
<b>Primary Markings</b>	<a href="#">H1-H2</a>
<b>Primary Terminals</b>	<a href="#">600 MCM – 2</a>
<b>Secondary Voltage</b>	<a href="#">220/440</a>
<b>Secondary Max Current</b>	<a href="#">681.82A</a>
<b>Secondary Markings</b>	<a href="#">X1-X2</a>
<b>Secondary Terminals</b>	<a href="#">600 MCM – 2</a>
<b>Primary Taps</b>	<a href="#">+/- 2 x 2.5%</a>
<b>Conductor Material</b>	<a href="#">Aluminum</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">98.70% (DOE 2016/NRCan 2019)</a>
<b>Impedance Range</b>	<a href="#">4.0 – 6.0%</a>
<b>Sound (db)</b>	<a href="#">50</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-8S</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
<b>Temperatue Rise</b>	<a href="#">150°C</a>



OFFICIAL QUOTE

150KVA 600 VOLTS TO 220/440  
VOLTS SINGLE PHASE ISOLATION  
TRANSFORMER



Insuation Class	<a href="#">150°C</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>