





BC112H-S/EP

\$24,883.00 CAD

SKU: fbef8f5b3a3d

Categories: [Encapsulated Isolation Transformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

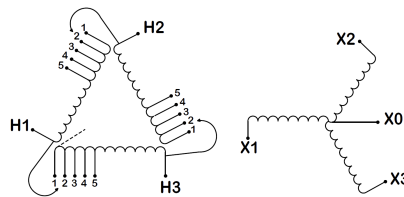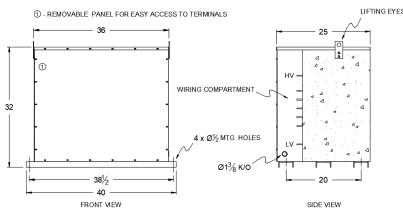

PRODUCT SPECIFICATIONS

Weight	1365 lbs
Phases	<u>3</u>
kVA	<u>112.5</u>
Connection	<u>3Ph-DY-5T-SD</u>
Primary Voltage	<u>480</u>
Primary Max Current	<u>135.3A</u>
Primary Markings	<u>H1-H2-3</u>
Primary Terminals	<u>300MCM-6</u>



Secondary Voltage	240Y/139
Secondary Max Current	270.6A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	600MCM-2
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
Temperatue Rise	130°C
Insuation Class	200°C
BIL (Insulation) Level	10kV
Efficiency	N/A
Impedance	1.5 – 3.5%
Sound (db)	50
Enclosure Type	NEMA 3R Indoor
Enclosure	E3R-3PEP-8
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered