


## SC2H1-K/EP

**\$568.55 USD**

SKU: 29c32e973ee4

Categories: [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

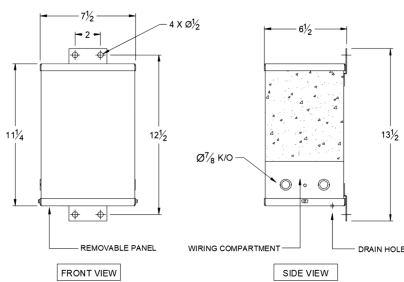

### PRODUCT SPECIFICATIONS

|               |                   |
|---------------|-------------------|
| <b>Weight</b> | 45 lbs            |
| <b>Phases</b> | <a href="#">1</a> |



|                                       |  |
|---------------------------------------|--|
| <b>kVA</b>                            | <a href="#">2</a>  |
| <b>Connection</b>                     | <a href="#">1Ph-1coil-NT-SD</a>  |
| <b>Primary Voltage</b>                | <a href="#">460</a>  |
| <b>Primary Max Current</b>            | <a href="#">4.3A</a>   |
| <b>Primary Markings</b>               | <a href="#">H1-H2</a>  |
| <b>Primary Terminals</b>              | <a href="#">Leads</a>  |
| <b>Secondary Voltage</b>              | <a href="#">120/240</a>  |
| <b>Secondary Max Current</b>          | <a href="#">16.7A</a>  |
| <b>Secondary Markings</b>             | <a href="#">X1-X3-X2-X4</a>  |
| <b>Secondary Terminals</b>            | <a href="#">Leads</a>  |
| <b>Primary Taps</b>                   | <a href="#">N/A</a>  |
| <b>Conductor Material</b>             | <a href="#">Copper</a>   |
| <b>Temperatue Rise</b>                | <a href="#">115°C</a>  |
| <b>Insuation Class</b>                | <a href="#">180°C</a>  |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Efficiency</b>                     | <a href="#">N/A</a>  |
| <b>Impedance</b>                      | <a href="#">1.5 – 3.5%</a>   |
| <b>Sound (db)</b>                     | <a href="#">40</a>   |
| <b>Enclosure Type</b>                 | <a href="#">NEMA 3R Indoor</a>   |
| <b>Enclosure</b>                      | <a href="#">E3R-1PEP-3</a>   |
| <b>Finish</b>                         | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |