




**RS75G1**

**\$1,162.15 USD**

SKU: 6bfa140f93d5

Categories: [Motor Starters](#)

**SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**

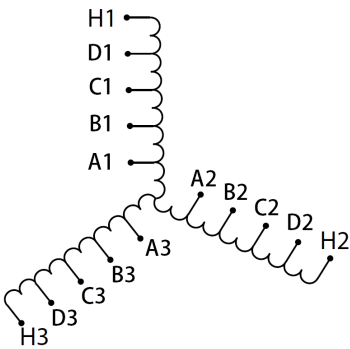

**PRODUCT SPECIFICATIONS**

|                            |                             |
|----------------------------|-----------------------------|
| <b>Weight</b>              | 120 lbs                     |
| <b>Phases</b>              | <a href="#">3</a>           |
| <b>HP</b>                  | <a href="#">75</a>          |
| <b>Connection</b>          | <a href="#">3PhA-ST-0-3</a> |
| <b>Primary Voltage</b>     | <a href="#">400</a>         |
| <b>Primary Max Current</b> | <a href="#">108.3A</a>      |
| <b>Primary Markings</b>    | <a href="#">H1-H2-H3</a>    |



|                                       |  |
|---------------------------------------|--|
| <b>Primary Terminals</b>              | <a href="#">Pads</a>   |
| <b>Secondary Voltage</b>              | <a href="#">50/65/80/100%</a>  |
| <b>Secondary Max Current</b>          | <a href="#">866A</a>   |
| <b>Secondary Markings</b>             | <a href="#">A-B-C-D</a>  |
| <b>Secondary Terminals</b>            | <a href="#">Pads</a>   |
| <b>Primary Taps</b>                   | <a href="#">N/A</a>  |
| <b>Conductor Material</b>             | <a href="#">Copper</a>   |
| <b>Temperatue Rise</b>                | <a href="#">150°C</a>  |
| <b>Insuation Class</b>                | <a href="#">220°C</a>  |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Efficiency</b>                     | <a href="#">N/A</a>  |
| <b>Impedance</b>                      | <a href="#">N/A</a>  |
| <b>Sound (db)</b>                     | <a href="#">N/A</a>  |
| <b>Enclosure Type</b>                 | <a href="#">Core &amp; Coil</a>  |
| <b>Enclosure</b>                      | <a href="#">N/A</a>  |
| <b>Finish</b>                         | <a href="#">N/A</a>  |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |