




# OFFICIAL QUOTE



**30KVA 480 VOLTS TO 208Y/120  
VOLTS THREE PHASE BOLT-ON  
BREAKER MINI POWER CENTER**

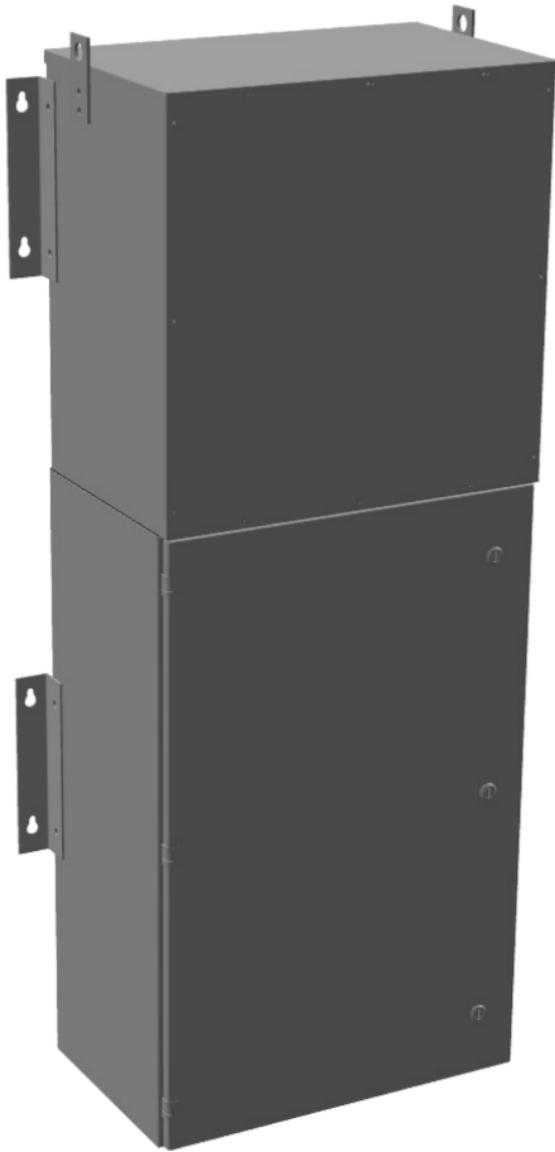


## **30KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER**

**\$13,665.00 CAD**


SKU: MP3A30H-M/BO/CLC

Categories: [Mini Power Centers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



Ref	A	B	C	D	E	F	G	H
Dim (inches)	23.25	14.5	60	23.6	36.5	8	26.5	25.38



The quote is valid 30 days from 14 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



## OFFICIAL QUOTE

**30KVA 480 VOLTS TO 208Y/120  
VOLTS THREE PHASE BOLT-ON  
BREAKER MINI POWER CENTER**



### PRODUCT SPECIFICATIONS

<b>Weight</b>	710 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">30</a>
<b>Connection</b>	<a href="#">MPC3P-5t</a>
<b>Primary Taps</b>	<a href="#">+/- 2 x 2.5%</a>
<b>Conductor Material</b>	<a href="#">Aluminum</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Impedance Range</b>	<a href="#">1.5 – 3.0%</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Outdoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-1PMPC-3B</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered</a>
<b>Incoming Voltage</b>	<a href="#">480</a>
<b>Primary Breaker</b>	<a href="#">80A</a>
<b>Interrupting Rating</b>	<a href="#">14kAIC @ 480V</a>
<b>Output Voltage</b>	<a href="#">208Y/120</a>
<b>Secondary Breaker</b>	<a href="#">100A</a>
<b>Short Circuit Withstand</b>	<a href="#">10kAIC @ 240V</a>
<b>Panel Board</b>	<a href="#">Bolt-On</a>
<b>Load Center Bus Material</b>	<a href="#">Copper</a>
<b># of Circuits</b>	<a href="#">30</a>
<b>Circuit Breaker Suitability</b>	<a href="#">Eaton Type BAB</a>
<b>Temperatue Rise</b>	<a href="#">130°C</a>



OFFICIAL QUOTE



30KVA 480 VOLTS TO 208Y/120  
VOLTS THREE PHASE BOLT-ON  
BREAKER MINI POWER CENTER

Insuation Class	<a href="#">200°C (Class N)</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>