


OFFICIAL QUOTE

3KVA 600 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER



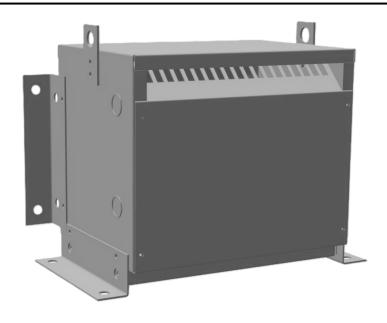

3KVA 600 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,463.00 CAD


Three Phase Isolation Transformer with a capacity of 3kVA, transforming 600 Volts to 460Y/266 Volts

SKU: BC3J-P1

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 3kVA, transforming 600 Volts to 460Y/266 Volts



OFFICIAL QUOTE



3KVA 600 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	73 lbs
Phases	3
kVA	3
Connection	3Ph-DY-3T-SD
Primary Voltage	600
Primary Max Current	2.89A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	<u>460Y/266</u>
Secondary Max Current	3.77A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	<u>Copper</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	<u>115°C</u>



OFFICIAL QUOTE



3KVA 600 VOLTS TO 460Y/266 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey