




OFFICIAL QUOTE

1500KVA 277 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER

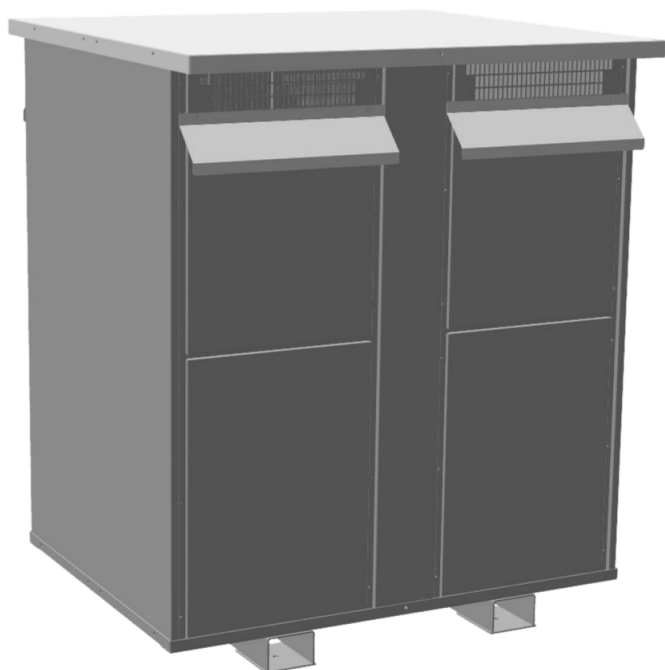

1500KVA 277 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



\$26,601.60 CAD

Three Phase Autotransformer with a capacity of 1500kVA, transforming 277Y Volts to 440Y Volts

SKU: RA1500D-H2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

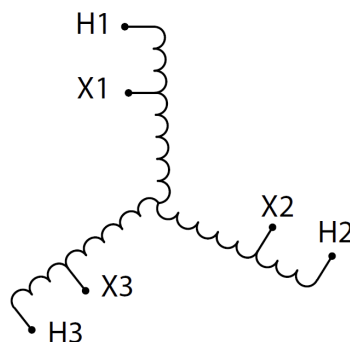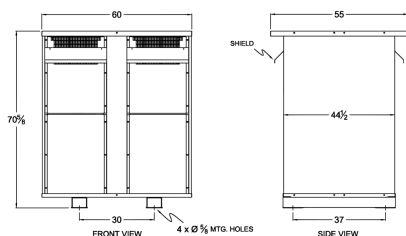

Three Phase Autotransformer with a capacity of 1500kVA, transforming 277Y Volts to 440Y Volts



OFFICIAL QUOTE

1500KVA 277 VOLTS TO 440 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	3704 lbs
Phases	3
kVA	1500
Connection	3PhA-NT-1
Primary Voltage	277
Primary Max Current	3126.4A
Primary Markings	X1-X2-X3
Primary Terminals	Pads
Secondary Voltage	440
Secondary Max Current	1968.2A
Secondary Markings	H1-H2-H3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	62
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-11
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**1500KVA 277 VOLTS TO 440 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------