



## 75HP 400 VOLTS THREE PHASE MOTOR STARTER


**\$1,578.00 CAD**

Three Phase Motor Starter with a capacity of  
75HP, suitable for 400 Volt Systems

SKU: RS75G1

Categories: [Motor Starting Autotransformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

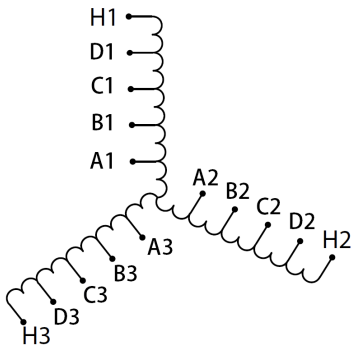

Three Phase Motor Starter with a capacity of 75HP, suitable for 400 Volt Systems



## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 120 lbs                                                                                              |
| Phases                     | <a href="#">3</a>                                                                                    |
| Connection                 | <a href="#">3PhA-ST-0-3</a>                                                                          |
| Primary Voltage            | <a href="#">400</a>                                                                                  |
| Primary Max Current        | <a href="#">N/A</a>                                                                                  |
| Primary Markings           | <a href="#">H1-H2-H3</a>                                                                             |
| Primary Terminals          | <a href="#">Pads</a>                                                                                 |
| Secondary Voltage          | <a href="#">50/65/80/100%</a>                                                                        |
| Secondary Max Current      | <a href="#">N/A</a>                                                                                  |
| Secondary Markings         | <a href="#">A-B-C-D</a>                                                                              |
| Secondary Terminals        | <a href="#">Pads</a>                                                                                 |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperatue Rise            | <a href="#">150°C</a>                                                                                |
| Insuation Class            | <a href="#">220°C (Class H)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">N/A</a>                                                                                  |
| Sound (db)                 | <a href="#">N/A</a>                                                                                  |
| Enclosure Type             | <a href="#">Core &amp; Coil</a>                                                                      |
| Enclosure Size             | <a href="#">N/A (Core &amp; Coil)</a>                                                                |
| Finish/Colour              | <a href="#">N/A</a>                                                                                  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE  
75HP 400 VOLTS THREE PHASE  
MOTOR STARTER



|                      |                            |
|----------------------|----------------------------|
| HP                   | <a href="#">75</a>         |
| Country/Manufacturer | <a href="#">Canada/RPM</a> |