# RS40B

## $723.95 USD

**SKU:** 5aa6f46cc683
**Categories:** Motor Starters

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

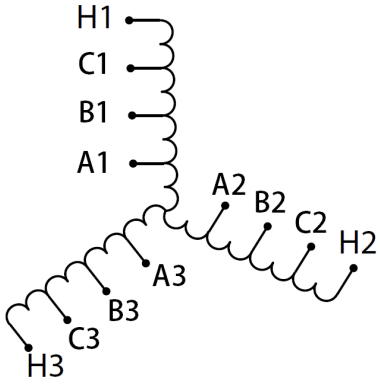


### PRODUCT SPECIFICATIONS

| | |
|---|---|
| **Weight** | 80 lbs |
| **Phases** | 3 |
| **HP** | 40 |
| **Connection** | 3PhA-ST-0-2 |
| **Primary Voltage** | 208 |
| **Primary Max Current** | 111A |

| | |
|---|---|
| **Primary Markings** | H1-H2-H3 |
| **Primary Terminals** | Large Scews |
| **Secondary Voltage** | 65/80/100% |
| **Secondary Max Current** | 355.3A |
| **Secondary Markings** | A-B-C |
| **Secondary Terminals** | Large Scews |
| **Primary Taps** | N/A |
| **Conductor Material** | Copper |
| **Temperatue Rise** | 115°C |
| **Insuation Class** | 180°C |
| **BIL (Insulation) Level** | 10kV |
| **Efficiency** | N/A |
| **Impedance** | N/A |
| **Sound (db)** | N/A |
| **Enclosure Type** | Core & Coil |
| **Enclosure** | N/A |
| **Finish** | N/A |
| **Standards & Certifications** | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |