





BC112H-N1/EP

\$25,247.00 CAD

SKU: e082dda2ee1d

Categories: [Encapsulated Isolation Transformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

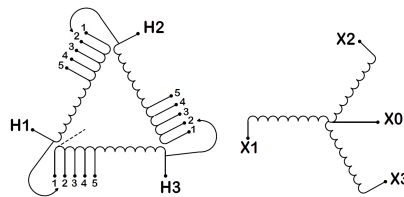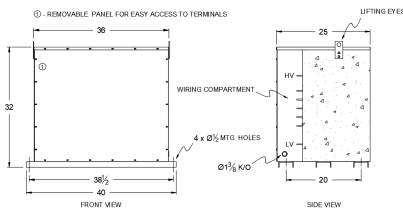

PRODUCT SPECIFICATIONS

| | |
|----------------------------|---------------------|
| Weight | 1365 lbs |
| Phases | <u>3</u> |
| kVA | <u>112.5</u> |
| Connection | <u>3Ph-DY-5T-SD</u> |
| Primary Voltage | <u>480</u> |
| Primary Max Current | <u>135.3A</u> |
| Primary Markings | <u>H1-H2-3</u> |
| Primary Terminals | <u>300MCM-6</u> |



| | |
|---------------------------------------|------------------------------------------------------------------------------------------------------|
| Secondary Voltage | 400Y/231 |
| Secondary Markings | X0-X1-X2-X3 |
| Secondary Terminals | 300MCM-6 |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | Copper |
| Temperatue Rise | 130°C |
| Insuation Class | 200°C |
| BIL (Insulation) Level | 10kV |
| Efficiency | N/A |
| Impedance | 1.5 – 3.5% |
| Sound (db) | 50 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | E3R-3PEP-8 |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |