




# RA75H-B/EP

## \$8,670.00 CAD

SKU: 8e3a39a74bec

Categories: [Encapsulated Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

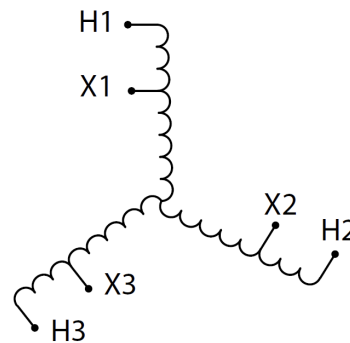

### PRODUCT SPECIFICATIONS

|                        |                           |
|------------------------|---------------------------|
| <b>Weight</b>          | 830 lbs                   |
| <b>Phases</b>          | <a href="#">3</a>         |
| <b>kVA</b>             | <a href="#">75</a>        |
| <b>Connection</b>      | <a href="#">3PhA-NT-1</a> |
| <b>Primary Voltage</b> | <a href="#">480</a>       |



|                                       |  |
|---------------------------------------|--|
| <b>Primary Max Current</b>            | <a href="#">90.2A</a>  |
| <b>Primary Markings</b>               | <a href="#">H1-H2-H3</a>   |
| <b>Primary Terminals</b>              | <a href="#">#2/0-6 AWG</a>   |
| <b>Secondary Voltage</b>              | <a href="#">208</a>  |
| <b>Secondary Max Current</b>          | <a href="#">208.2A</a>   |
| <b>Secondary Markings</b>             | <a href="#">X1-X2-X3</a>   |
| <b>Secondary Terminals</b>            | <a href="#">300MCM-6</a>   |
| <b>Primary Taps</b>                   | <a href="#">N/A</a>  |
| <b>Conductor Material</b>             | <a href="#">Aluminum</a>   |
| <b>Insulation Class</b>               | <a href="#">200°C</a>  |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Impedance</b>                      | <a href="#">0.5 – 1.5%</a>   |
| <b>Sound (db)</b>                     | <a href="#">45</a>   |
| <b>Enclosure Type</b>                 | <a href="#">NEMA 3R Indoor</a>   |
| <b>Enclosure</b>                      | <a href="#">E3R-3PEP-6</a>   |
| <b>Finish</b>                         | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |